




Connector for Single Phase Application

Features

- Compact design
- 16 coding options
- For hoods/housings size Han® 3 A
- Axial screw terminal
- Assembly without special tool

Attention!

For termination please use only hexagonal screw driver with wrench size 2.



Technical Characteristics


Electrical data accd. to DIN EN 61 984	40 A 400 V 6 kV 3
Working current	40 A
Working voltage	400 V
Rated impulse voltage	6 kV
Pollution degree	3
Wire gauge	4 to 6 mm ² (10 mm ² optional)
Tightening torque	1,8 Nm
Insulation resistance	≥ 10 ¹⁰ Ω
Material	Polycarbonate
Flammability accd. to UL 94	V 0
Mechanical working life	≥ 500 mating cycles

Identification	Part-Number	Drawing	Dimensions in mm
----------------	-------------	---------	------------------

Han® Q 2/0


Male

09 12 002 2651

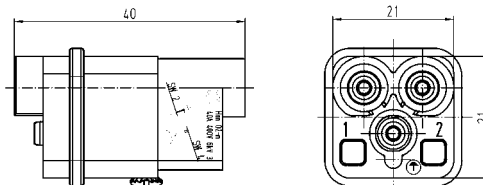


Female

09 12 002 2751

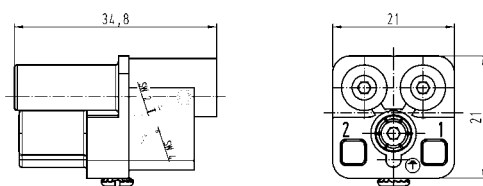

Coding element

09 12 000 9922



Screw driver for axial screw terminal

With cross handle

09 99 000 0313

Bit ¼"

09 99 000 0369

